




LED WALL LIGHTS

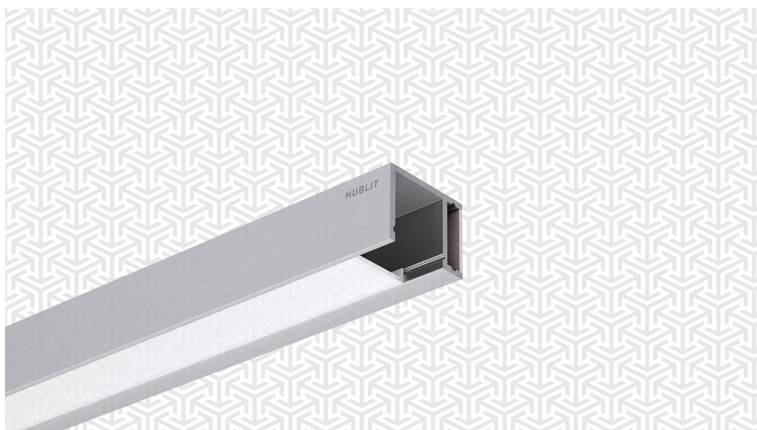

Casione LED Wall Lights

General Specifications

| | |
|----------------------|---------|
| Mounting Type | Surface |
| Limited Warranty | 2 Years |
| Lighting Source Type | SMD LED |

Fixture Specifications

| | |
|-------------------|--------------------|
| Housing Material | Extruded Aluminium |
| Diffuser Material | Polycarbonate |
| Surface Finish | Anodised |
| Driver Type | External |

Performance Specifications

| | |
|------------------------------|---------|
| Colour rendering index (CRI) | 80+ |
| Start up time | Instant |
| Efficacy (Lm / W) | 100+ |

Electrical Specifications

| | |
|---------------------------|---------------|
| Input Voltage (VAC) | 150 - 270 VAC |
| Total Harmonic Distorsion | Upto 10% |
| Power Factor | 0.95 + |
| Driver Efficiency | Upto 80% |

Safety Features

| | |
|--------------------------|----------|
| Ingress Protection | IP44 |
| Surge Protection | Upto 2KV |
| Short Circuit Protection | Yes |
| Open Circuit Protection | Yes |

Environmental Specification

| | |
|---------------------|-----------|
| Working Temperature | 0 to 40 C |
| Vibrations | 1G |

Mechanical Specifications

| | |
|---------------------------------|-------------|
| Luminaire Dimension (L X W X H) | 32mm X 25mm |
|---------------------------------|-------------|

HOW TO ORDER

HUB - CASIONE - 10W/F - BL - 4050K


| | | | |
|----------------------|---|-------------------|---|
| Input Power | 1 | Housing Colour | 2 |
| 2W/F : 2W/F | | GR : Grey | |
| 6W/F : 6W/F | | WH : White | |
| 10W/F : 10W/F | | BL : Black | |

| | |
|------------------------------|---|
| Colour Temperature (CCT) | 3 |
| 2732K : 2700K - 3200K | |
| 4050K : 4000K - 5000K | |
| 6050K : 6000K - 6500K | |

How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

Example : HUB - CASIONE - 10W/F - BL - 4050K

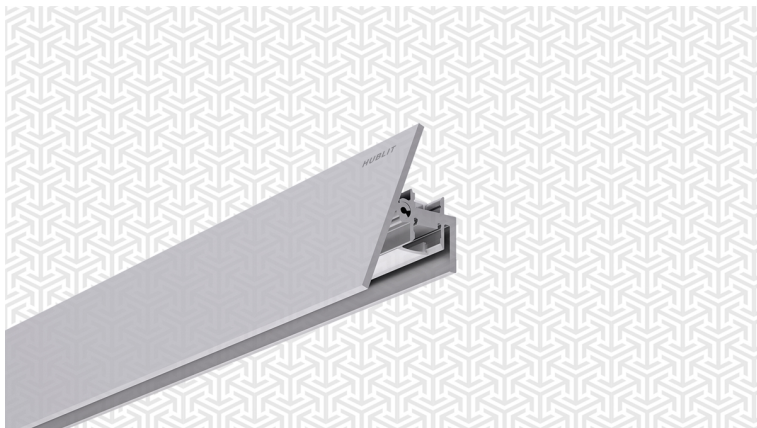

Harrive LED Wall Lights

General Specifications

| | |
|----------------------|---------|
| Mounting Type | Surface |
| Limited Warranty | 2 Years |
| Lighting Source Type | SMD LED |

Fixture Specifications

| | |
|-------------------|--------------------|
| Housing Material | Extruded Aluminium |
| Diffuser Material | Polycarbonate |
| Surface Finish | Anodised |
| Driver Type | External |

Performance Specifications

| | |
|------------------------------|---------|
| Colour rendering index (CRI) | 80+ |
| Start up time | Instant |
| Efficacy (Lm / W) | 100+ |

Electrical Specifications

| | |
|---------------------------|---------------|
| Input Voltage (VAC) | 150 - 270 VAC |
| Total Harmonic Distorsion | Upto 10% |
| Power Factor | 0.95 + |
| Driver Efficiency | Upto 80% |

Safety Features

| | |
|--------------------------|----------|
| Ingress Protection | IP44 |
| Surge Protection | Upto 2KV |
| Short Circuit Protection | Yes |
| Open Circuit Protection | Yes |

Environmental Specification

| | |
|---------------------|-----------|
| Working Temperature | 0 to 40 C |
| Vibrations | 1G |

Mechanical Specifications

| | |
|---------------------------------|-------------|
| Luminaire Dimension (L X W X H) | 30mm X 40mm |
|---------------------------------|-------------|

HOW TO ORDER

HUB - HARRIVE - 3W/F - WH - 4050K


| | | | |
|--------------------|---|-------------------|---|
| Input Power | 1 | Housing Colour | 2 |
| 3W/F : 3W/F | | GR : Grey | |
| 5W/F : 5W/F | | WH : White | |
| | | BL : Black | |

| | |
|------------------------------|---|
| Colour Temperature (CCT) | 3 |
| 2732K : 2700K - 3200K | |
| 4050K : 4000K - 5000K | |
| 6050K : 6000K - 6500K | |

How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

Example : HUB - HARRIVE - 3W/F - WH - 4050K

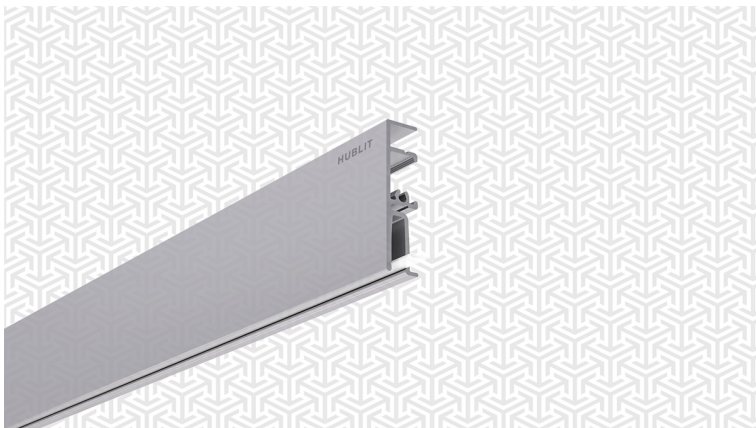

Superor LED Wall Lights

General Specifications

| | |
|----------------------|---------|
| Mounting Type | Surface |
| Limited Warranty | 2 Years |
| Lighting Source Type | SMD LED |

Fixture Specifications

| | |
|-------------------|--------------------|
| Housing Material | Extruded Aluminium |
| Diffuser Material | Polycarbonate |
| Surface Finish | Anodised |
| Driver Type | External |

Performance Specifications

| | |
|------------------------------|---------|
| Colour rendering index (CRI) | 80+ |
| Start up time | Instant |
| Efficacy (Lm / W) | 100+ |

Electrical Specifications

| | |
|---------------------------|---------------|
| Input Voltage (VAC) | 150 - 270 VAC |
| Total Harmonic Distorsion | Upto 10% |
| Input Frequency | 50 to 60 Hz |
| Power Factor | 0.95 + |
| Driver Efficiency | Upto 80% |

Safety Features

| | |
|--------------------------|----------|
| Ingress Protection | IP44 |
| Surge Protection | Upto 2KV |
| Short Circuit Protection | Yes |
| Open Circuit Protection | Yes |

Environmental Specification

| | |
|---------------------|-----------|
| Working Temperature | 0 to 40 C |
| Vibrations | 1G |

Mechanical Specifications

| | |
|---------------------------------|-------------|
| Luminaire Dimension (L X W X H) | 45mm X 11mm |
|---------------------------------|-------------|

HOW TO ORDER

HUB - SUPEROR - 5W/F - BL - 2732K

| | | | |
|--------------------|---|-------------------|---|
| Input Power | 1 | Housing Colour | 2 |
| 3W/F : 3W/F | | GR : Grey | |
| 5W/F : 5W/F | | WH : White | |
| | | BL : Black | |

| | |
|------------------------------|---|
| Colour Temperature (CCT) | 3 |
| 2732K : 2700K - 3200K | |
| 4050K : 4000K - 5000K | |
| 6050K : 6000K - 6500K | |

How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

Example : HUB - SUPEROR - 5W/F - BL - 2732K



Woment LED Wall Lights

General Specifications

| | |
|----------------------|---------|
| Mounting Type | Surface |
| Limited Warranty | 2 Years |
| Lighting Source Type | SMD LED |

Fixture Specifications

| | |
|-------------------|--------------------|
| Housing Material | Extruded Aluminium |
| Diffuser Material | Polycarbonate |
| Surface Finish | Powder Coated |
| Driver Type | External |

Performance Specifications

| | |
|------------------------------|---------|
| Colour rendering index (CRI) | 80+ |
| Start up time | Instant |
| Efficacy (Lm / W) | 100+ |

Electrical Specifications

| | |
|---------------------------|---------------|
| Input Voltage (VAC) | 150 - 270 VAC |
| Total Harmonic Distorsion | Upto 10% |
| Input Frequency | 50 to 60 Hz |
| Power Factor | 0.95 + |
| Driver Efficiency | Upto 80% |

Safety Features

| | |
|--------------------------|----------|
| Ingress Protection | IP44 |
| Surge Protection | Upto 2KV |
| Short Circuit Protection | Yes |
| Open Circuit Protection | Yes |

Environmental Specification

| | |
|---------------------|-----------|
| Working Temperature | 0 to 40 C |
| Vibrations | 1G |

Mechanical Specifications

| | |
|---------------------------------|-------------|
| Luminaire Dimension (L X W X H) | 70mm X 11mm |
|---------------------------------|-------------|

HOW TO ORDER

HUB - WOMENT - 6W/F - GR - 4050K

| | | | |
|----------------------|---|-------------------|---|
| Input Power | 1 | Housing Colour | 2 |
| 2W/F : 2W/F | | GR : Grey | |
| 6W/F : 6W/F | | WH : White | |
| 10W/F : 10W/F | | BL : Black | |

| | |
|------------------------------|---|
| Colour Temperature (CCT) | 3 |
| 2732K : 2700K - 3200K | |
| 4050K : 4000K - 5000K | |
| 6050K : 6000K - 6500K | |

How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

Example : HUB - WOMENT - 6W/F - GR - 4050K