
HUBLIT

1G



HOW TO ORDER

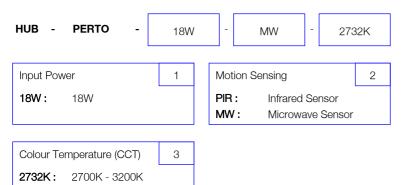

How to order example

4000K - 5000K

6000K - 6500K

4050K:

6050K:

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product

Example: HUB - PERTO - 18W - MW - 2732K

Perto LED Tube Lights

General	Specifications

Mounting Type	Surface
Limited Warranty	2 Years
Beam Angle	120 Degrees
Lighting Source Type	SMD LED
Fixture Specifications	
Housing Material	Extruded Aluminium
Diffuser Material	Polycarbonate
Surface Finish	Anodised
Housing Colour	Grey
Driver Type	Integrated
Performance Specifications	
Rated LED Burning Hours	50,000 Hrs
Start up time	Instant
Efficacy (Lm / W)	100+
Electrical Specifications	
Input Voltage (VAC)	150 - 270 VAC
Input Frequency	50 Hz
Safety Features	
Ingress Protection	IP20
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes
Environmental Specification	
Working Temperature	0 to 40 C



Vibrations