


**LED RECESSED  
TRIMLESS LINEAR  
LIGHTS**

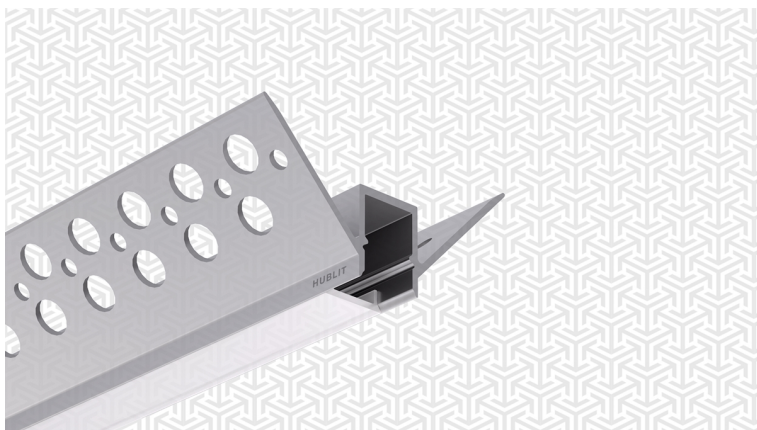

## Enconi LED Recessed Trimless Linear Lights

### General Specifications

Mounting Type	Surface
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Extruded Aluminium
Diffuser Material	Polycarbonate
Surface Finish	Anodised
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	100+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP44
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	46mm X 14mm
---------------------------------	-------------

### HOW TO ORDER

**HUB - ENCONI - 3W/F - WH - 4050K**

Input Power	1	Housing Colour	2
<b>1W/F :</b> 1W/F		<b>GR :</b> Grey	
<b>3W/F :</b> 3W/F		<b>WH :</b> White	
		<b>BL :</b> Black	

Colour Temperature (CCT)	3
<b>2732K :</b> 2700K - 3200K	
<b>4050K :</b> 4000K - 5000K	
<b>6050K :</b> 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - ENCONI - 3W/F - WH - 4050K**





## Parlet LED Recessed Trimless Linear Lights

### General Specifications

Mounting Type	Recessed
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Extruded Aluminium
Diffuser Material	Polycarbonate
Surface Finish	Anodised
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	100+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP44
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	57mm
---------------------------------	------

## HOW TO ORDER

**HUB - PARLET - 3W/F - WH - 2732K**

Input Power	1	Housing Colour	2
<b>1W/F :</b> 1W/F		<b>GR :</b> Grey	
<b>3W/F :</b> 3W/F		<b>WH :</b> White	
		<b>BL :</b> Black	

Colour Temperature (CCT)	3
<b>2732K :</b> 2700K - 3200K	
<b>4050K :</b> 4000K - 5000K	
<b>6050K :</b> 6000K - 6500K	


### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - PARLET - 3W/F - WH - 2732K**





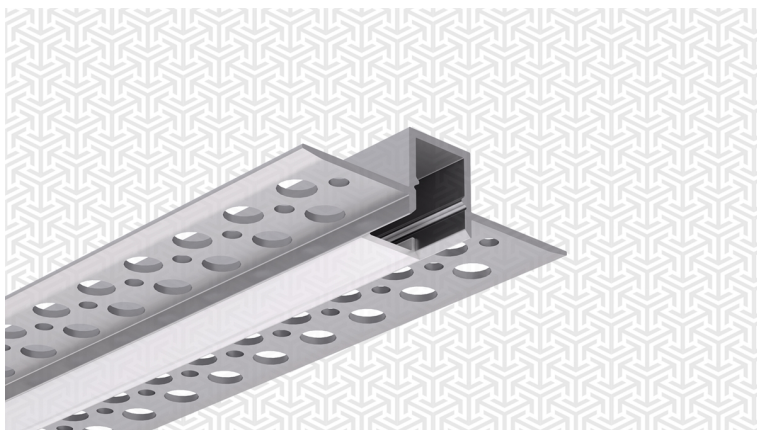

## Persus LED Recessed Trimless Linear Lights

### General Specifications

Mounting Type	Recessed
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Extruded Aluminium
Diffuser Material	Polycarbonate
Surface Finish	Anodised
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	100+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP44
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	14mm X 12mm
---------------------------------	-------------

## HOW TO ORDER

**HUB - PERSUS - 3W/F - BL - 6050K**

Input Power	1	Housing Colour	2
<b>1W/F :</b> 1W/F		<b>GR :</b> Grey	
<b>3W/F :</b> 3W/F		<b>WH :</b> White	
		<b>BL :</b> Black	

Colour Temperature (CCT)	3
<b>2732K :</b> 2700K - 3200K	
<b>4050K :</b> 4000K - 5000K	
<b>6050K :</b> 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - PERSUS - 3W/F - BL - 6050K**





## Possimo LED Recessed Trimless Linear Lights

### General Specifications

Mounting Type	Recessed
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Extruded Aluminium
Diffuser Material	Polycarbonate
Surface Finish	Anodised
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	100+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP44
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	47mm X 13mm
---------------------------------	-------------

### HOW TO ORDER

**HUB - POSSIMO - 5W/F - BL - 6050K**

Input Power	1	Housing Colour	2
<b>3W/F :</b> 3W/F		<b>GR :</b> Grey	
<b>5W/F :</b> 5W/F		<b>WH :</b> White	
		<b>BL :</b> Black	

Colour Temperature (CCT)	3
<b>2732K :</b> 2700K - 3200K	
<b>4050K :</b> 4000K - 5000K	
<b>6050K :</b> 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - POSSIMO - 5W/F - BL - 6050K**



## Timenti LED Recessed Trimless Linear Lights

### General Specifications

Mounting Type	Recessed
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Extruded Aluminium
Diffuser Material	Polycarbonate
Surface Finish	Anodised
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	100+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP44
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### HOW TO ORDER

**HUB - TIMENTI - 3W/F - WH - 2732K**

Input Power	1	Housing Colour	2
<b>3W/F :</b> 3W/F		<b>GR :</b> Grey	
<b>5W/F :</b> 5W/F		<b>WH :</b> White	
		<b>BL :</b> Black	

Colour Temperature (CCT)	3
<b>2732K :</b> 2700K - 3200K	
<b>4050K :</b> 4000K - 5000K	
<b>6050K :</b> 6000K - 6500K	

#### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - TIMENTI - 3W/F - WH - 2732K**