




**LED WOODEN  
LINEAR LIGHTS**

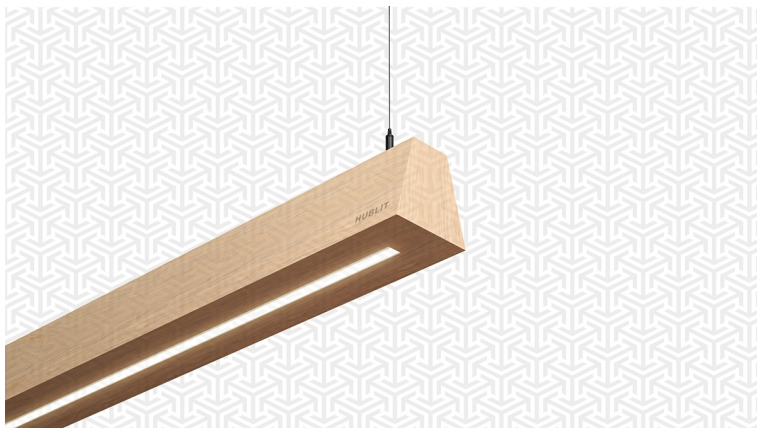

## Alson LED Wooden Linear Lights

### General Specifications

Mounting Type	Suspended
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Wooden
Diffuser Material	Polycarbonate
Surface Finish	Matte
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	90+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.90 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP20
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	L X 50mm X 50mm
---------------------------------	-----------------

## HOW TO ORDER

HUB - ALSON - 3W/F - 2732K

Input Power	1	Colour Temperature (CCT)	2
1W/F : 1W/F		2732K : 2700K - 3200K	
3W/F : 3W/F		4050K : 4000K - 5000K	
5W/F : 5W/F		6050K : 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - ALSON - 3W/F - 2732K**



## Nanced LED Wooden Linear Lights

### General Specifications

Mounting Type	Suspended
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Wooden
Diffuser Material	Polycarbonate
Surface Finish	Matte
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	90+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.90 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP20
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	L X 50mm X 50mm
---------------------------------	-----------------

## HOW TO ORDER

HUB - NANCED - 1W/F - 6050K

Input Power	1	Colour Temperature (CCT)	2
1W/F : 1W/F		2732K : 2700K - 3200K	
3W/F : 3W/F		4050K : 4000K - 5000K	
5W/F : 5W/F		6050K : 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - NANCED - 1W/F - 6050K**





## Otium LED Wooden Linear Lights

### General Specifications

Mounting Type	Suspended
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Wooden
Diffuser Material	Polycarbonate
Surface Finish	Matte
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	90+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP20
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	L X 50mm X 30mm
---------------------------------	-----------------

## HOW TO ORDER

HUB - OTIUM - 5W/F - 6050K

Input Power	1	Colour Temperature (CCT)	2
1W/F : 1W/F		2732K : 2700K - 3200K	
3W/F : 3W/F		4050K : 4000K - 5000K	
5W/F : 5W/F		6050K : 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - OTIUM - 5W/F - 6050K**



## Trangor LED Wooden Linear Lights

### General Specifications

Mounting Type	Suspended
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Wooden
Diffuser Material	Polycarbonate
Surface Finish	Matte
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	90+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.90 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP20
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	L X 50mm X 50mm
---------------------------------	-----------------

## HOW TO ORDER

HUB - TRANGOR -

5W/F


4050K

Input Power	1	Colour Temperature (CCT)	2
1W/F : 1W/F		2732K : 2700K - 3200K	
3W/F : 3W/F		4050K : 4000K - 5000K	
5W/F : 5W/F		6050K : 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - TRANGOR - 5W/F - 4050K**

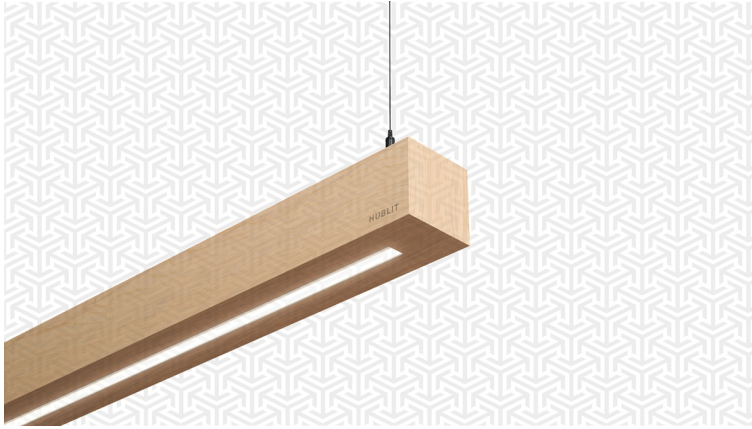

## Woral LED Wooden Linear Lights

### General Specifications

Mounting Type	Suspended
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Wooden
Diffuser Material	Polycarbonate
Surface Finish	Matte
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	90+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP20
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	L X 50mm X 50mm
---------------------------------	-----------------

## HOW TO ORDER


HUB - WORAL - 3W/F - 2732K

Input Power	1	Colour Temperature (CCT)	2
1W/F : 1W/F		2732K : 2700K - 3200K	
3W/F : 3W/F		4050K : 4000K - 5000K	
5W/F : 5W/F		6050K : 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - WORAL - 3W/F - 2732K**

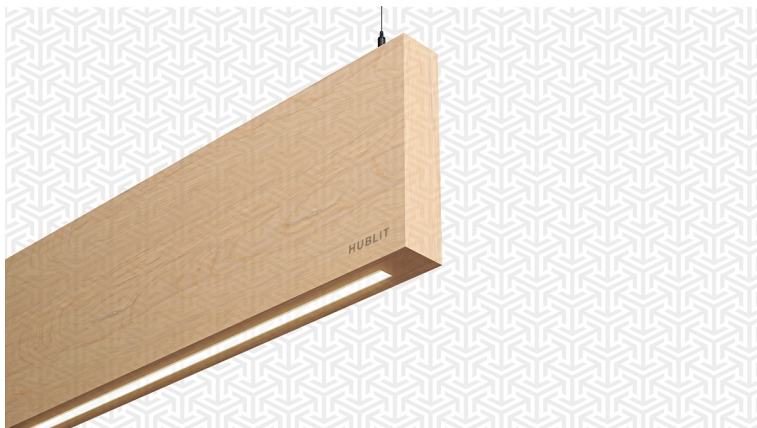

## Worthis LED Wooden Linear Lights

### General Specifications

Mounting Type	Suspended
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Wooden
Diffuser Material	Polycarbonate
Surface Finish	Matte
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	90+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP20
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	L X 30mm X 125mm
---------------------------------	------------------

## HOW TO ORDER

HUB - WORTHIS -

1W/F


2732K

Input Power	1	Colour Temperature (CCT)	2
1W/F :	1W/F	2732K :	2700K - 3200K
3W/F :	3W/F	4050K :	4000K - 5000K
5W/F :	5W/F	6050K :	6000K - 6500K

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - WORTHIS - 1W/F - 2732K**

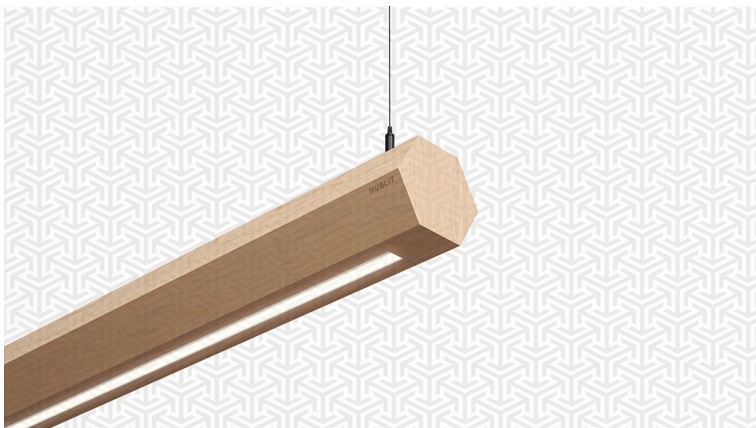

## Wouton LED Wooden Linear Lights

### General Specifications

Mounting Type	Suspended
Limited Warranty	2 Years
Lighting Source Type	SMD LED

### Fixture Specifications

Housing Material	Wooden
Diffuser Material	Polycarbonate
Surface Finish	Matte
Driver Type	External

### Performance Specifications

Colour rendering index (CRI)	80+
Start up time	Instant
Efficacy (Lm / W)	90+

### Electrical Specifications

Input Voltage (VAC)	150 - 270 VAC
Total Harmonic Distorsion	Upto 10%
Input Frequency	50 to 60 Hz
Power Factor	0.95 +
Driver Efficiency	Upto 80%

### Safety Features

Ingress Protection	IP20
Surge Protection	Upto 2KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes

### Environmental Specification

Working Temperature	0 to 40 C
Vibrations	1G

### Mechanical Specifications

Luminaire Dimension (L X W X H)	L X 50mm X 50mm
---------------------------------	-----------------

## HOW TO ORDER

HUB - WOUTON -

5W/F

4050K

Input Power	1	Colour Temperature (CCT)	2
1W/F : 1W/F		2732K : 2700K - 3200K	
3W/F : 3W/F		4050K : 4000K - 5000K	
5W/F : 5W/F		6050K : 6000K - 6500K	

### How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value. Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

**Example : HUB - WOUTON - 5W/F - 4050K**